


PLAN VIEW

SEAL ABANDONED PIPE WITH BRICK
& MORTAR OR GASKETED PVC CAP
IF NOT REMOVED TO RIGHT OF WAY

PEA STONE OR No. 8 AGGREGATE,
FULLY ENCASED

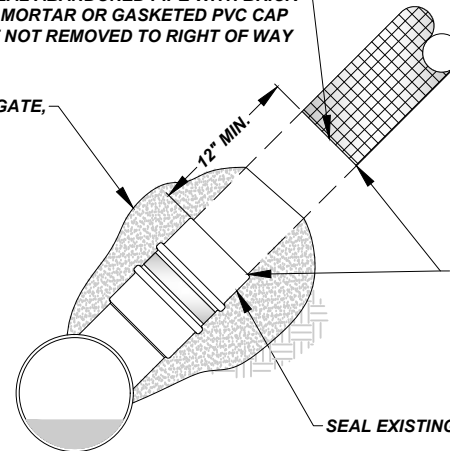

PROFILE VIEW

CITY PREFERS FULL REMOVAL OF EXISTING
SEWER LATERAL. IF AGREED TO BY CITY
ENGINEERING DEPARTMENT, REMOVE 12" MIN.
SECTION OF EXISTING SEWER LATERAL AND
SEAL EXISTING LATERAL WITH GROUT TO THE
RIGHT OF WAY

SEAL EXISTING WYE WITH GASKETED PVC CAP

NOTES:

1. BACKFILL TRENCH WITH B-BORROW
COMPACTED TO 95% MODIFIED PROCTOR
2. SEE ROADWAY PATCH DETAILS FOR
REQUIREMENTS TO REPAIR ROADWAY

RETIREMENT OF PVC SEWER LATERAL

NOT TO SCALE

The City Of Goshen
Department of Public Works & Safety
Office of Engineering

204 East Jefferson, Suite 1 Street, Goshen, Indiana 46528
Phone: 574-534-2201 Fax: 574-533-8626
Web: goshenindiana.org

Date Approved By The City Of Goshen Board Of Public Works & Safety and Approved Revisions

03/27/2025

CITY OF GOSHEN, INDIANA
STANDARD DETAIL

Drafted By: J. Hoffman
Approved By: D. Sailor, P.E.
Drawing Number: SW-120