




**STAINLESS STEEL 304
ADJUSTABLE STRAP**

NOTES:

1. BOLTS, NUTS AND WASHERS, 1/2" UNC ROLL THREAD TEFLON COATED
2. 3 1/2" WIDE BAND FOR SPREADING OUT CLAMP FORCE ON PIPE
3. THE STAINLESS WELDS ARE FULLY PASSIVATED
4. EXCESS STRAP GOES BETWEEN PIPE AND BAND

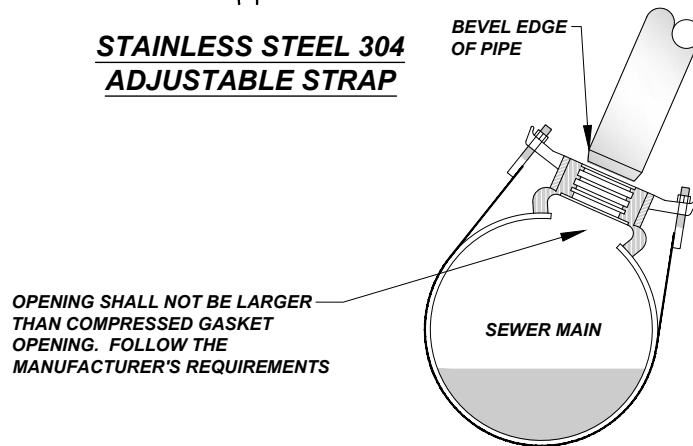

SEWER SADDLE CONFORMING TO PIPE


TES:

PIPE TO BE TAPPED USING A HOLE SAW OR APPROVED EQUAL, HOLES SHALL NOT BE LARGER THAN THE INSIDE HOLE OF THE GASKET

INSERTION TEES ARE NOT ALLOWED ON PIPE 18 INCH OR LESS IN DIAMETER UNLESS APPROVED BY THE CITY

LATERAL PIPE SHALL NOT PROTRUDE BEYOND INTERIOR WALL OF THE MAIN LINE

DETAIL SHOWS ROMAC BRAND. OTHER MANUFACTURERS MAY BE ACCEPTED BY CITY ENGINEERING DEPARTMENT UPON REVIEW OF MANUFACTURER'S SUBMITTAL

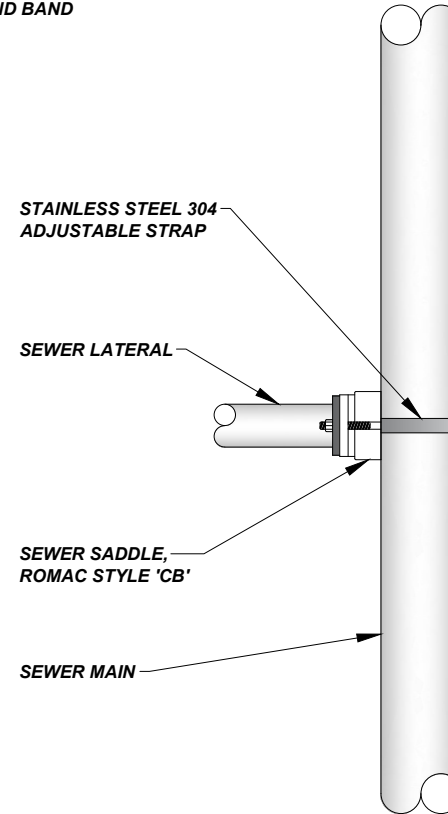

ROMAC 'CB' SEWER SADDLE

NOT TO SCALE