

QUICK CONNECT TEST TERMINAL  
LID W/ PERMANENT 'REAL'  
MAGNET TO BE INSTALLED FOR  
ELECTRONIC LOCATION

WIRE TERMINAL BLOCK SECURED TO LID

MIN. 15" OF EXCESS COIL,  
TRACER WIRE


CAST IRON MONITORING STATION  
BY FARWEST CORROSION  
CONTROL OR APPROVED EQUAL

FLARED END REQUIRED

### TRACER WIRE BELOW GRADE CONNECTION POINT

#### NOTES:

1. TRACER WIRE ACCESS POINTS SHALL BE A  
MAXIMUM OF 500' APART
2. ACCESS POINTS SHALL BE LOCATED AT  
VALVES, BOXES, ROAD CROSSINGS, MAJOR  
PIPE TURNS OR DIRECTIONAL CHANGES

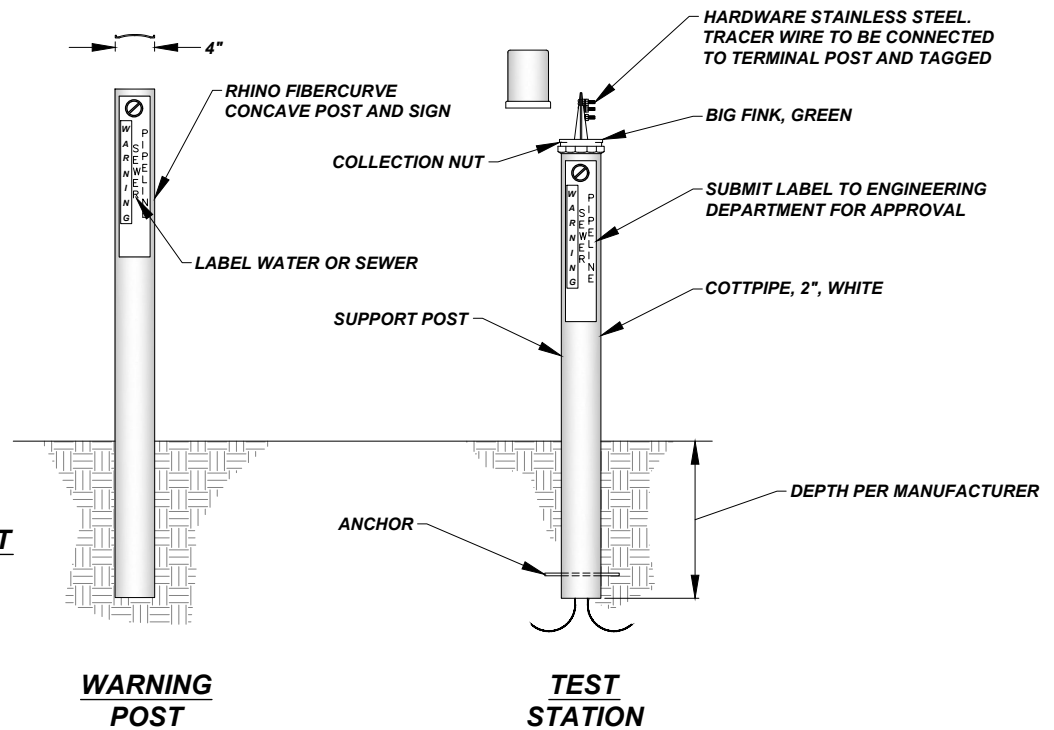

## **BURIED UTILITY WARNING POST & TEST STATION**

NOT TO SCALE

*The City Of Goshen*  
Department of Public Works & Safety  
Office of Engineering

204 East Jefferson, Suite 1 Street, Goshen, Indiana 46528  
Phone: 574-534-2201 Fax: 574-533-8626  
Web: goshenindiana.org

Date Approved By The City Of Goshen Board Of Public Works & Safety and Approved Revisions

03/27/2025

**CITY OF GOSHEN, INDIANA**  
**STANDARD DETAIL**

Drafted By: J. Hoffman  
Approved By: D. Sailor, P.E.

Drawing Number:  
**SW-124**