

CAP (GREEN)



STAINLESS STEEL HARDWARE, MIN. FIVE  
(5) TERMINALS, TAG TRACER WIRES

STANDARD WARNING LABEL  
IF THE STATION CANNOT BE  
PLACED DIRECTLY OVER THE  
UTILITY, AN ADDITIONAL STICKER  
WITH THE OFFSET DISTANCE AND  
DIRECTION IS REQUIRED

4" PVC POST (GREEN)

1/2" SOLID PVC CROSS BAR

DRYCONN DIRECT BURY LUG  
OR SIMILAR PRODUCT

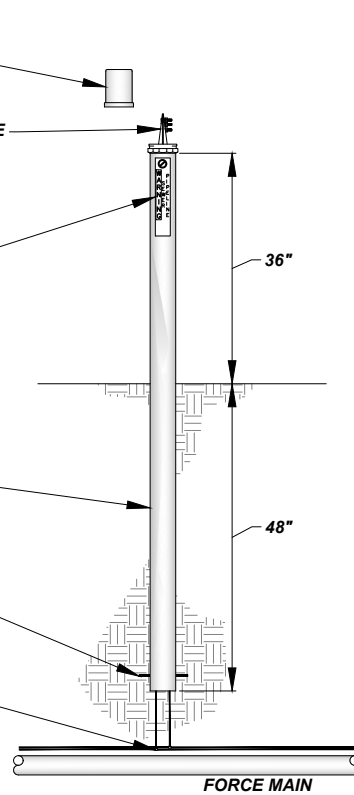


QUICK CONNECT TEST TERMINAL  
LID W/ PERMANENT 'REAL'  
MAGNET TO BE INSTALLED FOR  
ELECTRONIC LOCATION

WIRE TERMINAL BLOCK SECURED TO LID

MIN. 15" OF EXCESS COIL,  
TRACER WIRE

CAST IRON MONITORING STATION  
BY FARWEST CORROSION CONTROL  
OR APPROVED EQUAL

FLARED END REQUIRED



**TRACER WIRE BELOW GRADE CONNECTION POINT**

## **FORCE MAIN LOCATION STATION**

NOT TO SCALE

*The City Of Goshen*  
Department of Public Works & Safety  
Office of Engineering

204 East Jefferson, Suite 1 Street, Goshen, Indiana 46528  
Phone: 574-534-2201 Fax: 574-533-8626  
Web: goshenindiana.org

Date Approved By The City Of Goshen Board Of Public Works & Safety and Approved Revisions

03/27/2025

**CITY OF GOSHEN, INDIANA  
STANDARD DETAIL**

Drafted By: J. Hoffman  
Approved By: D. Sailor, P.E.

Drawing Number:  
**SW-125**