

CAP (GREEN)



STAINLESS STEEL HARDWARE, MIN. FIVE
(5) TERMINALS, TAG TRACER WIRES

STANDARD WARNING LABEL
IF THE STATION CANNOT BE
PLACED DIRECTLY OVER THE
UTILITY, AN ADDITIONAL STICKER
WITH THE OFFSET DISTANCE AND
DIRECTION IS REQUIRED

4" PVC POST (GREEN)

1/2" SOLID PVC CROSS BAR

DRYCONN DIRECT BURY LUG
OR SIMILAR PRODUCT

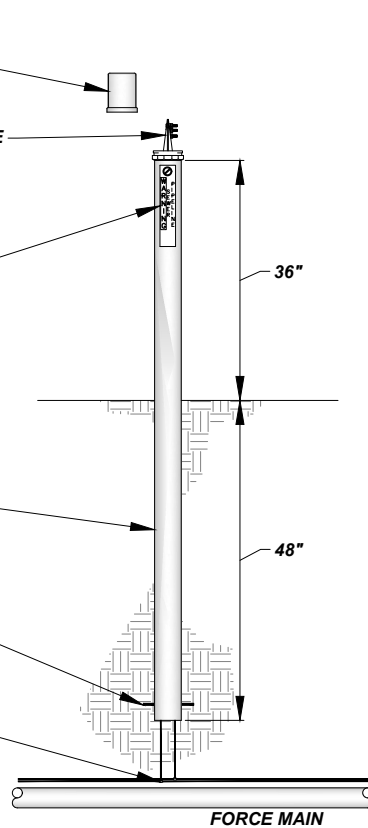


QUICK CONNECT TEST TERMINAL
LID W/ PERMANENT 'REAL'
MAGNET TO BE INSTALLED FOR
ELECTRONIC LOCATION

WIRE TERMINAL BLOCK SECURED TO LID

MIN. 15" OF EXCESS COIL,
TRACER WIRE

CAST IRON MONITORING STATION
BY FARWEST CORROSION CONTROL
OR APPROVED EQUAL

FLARED END REQUIRED



TRACER WIRE BELOW GRADE CONNECTION POINT

FORCE MAIN LOCATION STATION

NOT TO SCALE