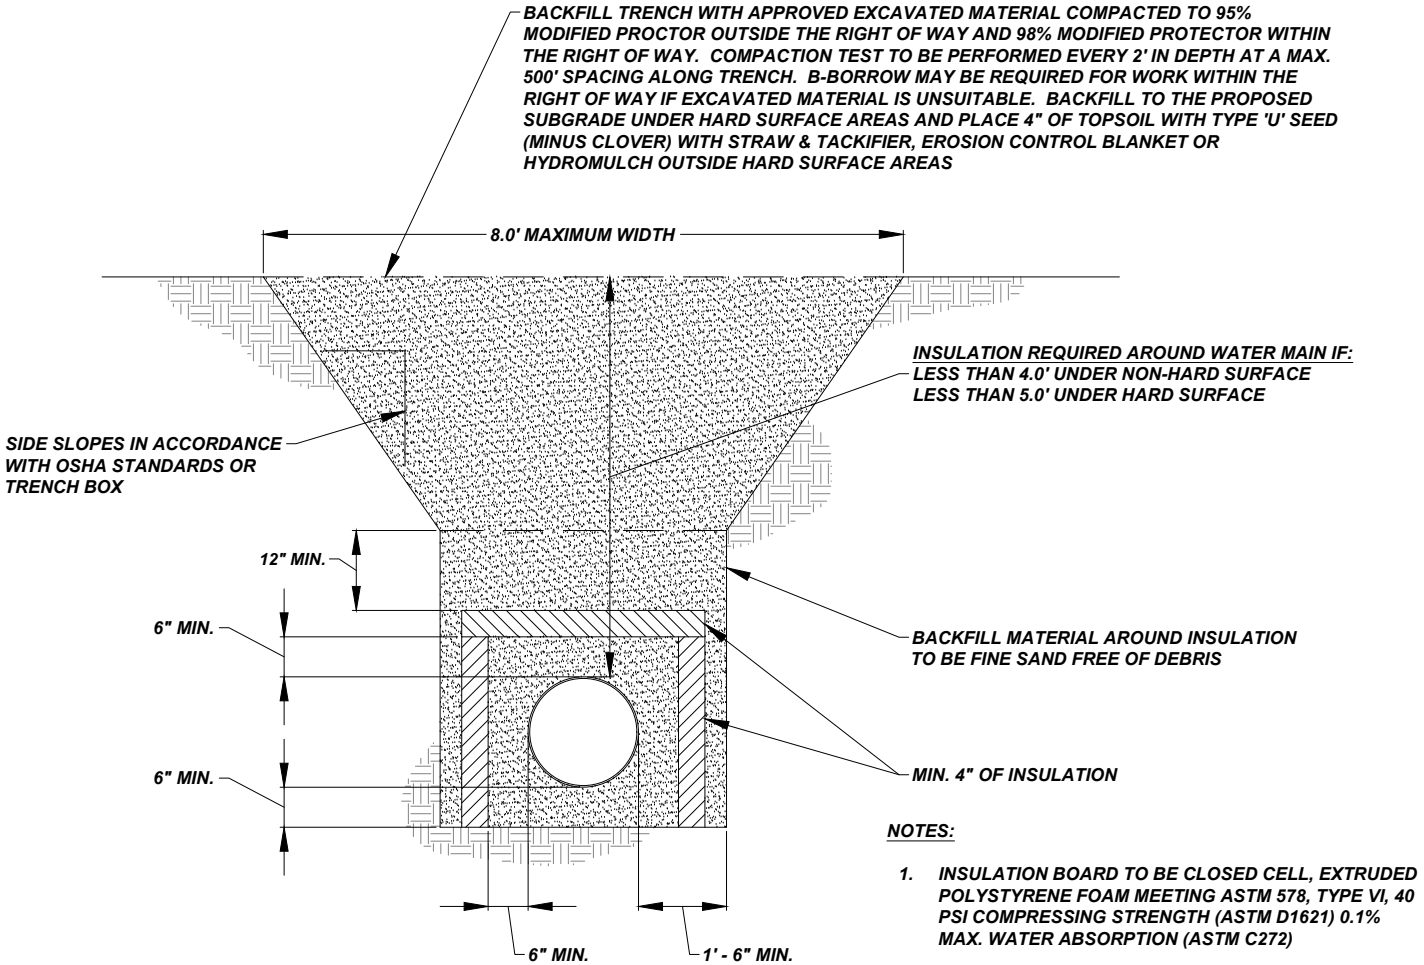

NOTES:

1. INSULATION BOARD TO BE CLOSED CELL, EXTRUDED POLYSTYRENE FOAM MEETING ASTM 578, TYPE VI, 40 PSI COMPRESSING STRENGTH (ASTM D1621) 0.1% MAX. WATER ABSORPTION (ASTM C272)
2. SEAL BOARD JOINS WITH BUTYL TAPE

INSULATED WATER MAIN TRENCH

NOT TO SCALE